


Presto FF-C18

150 x 4.6 mm


Application

Polystyrene

ポリスチレン



polystyrene (ca.200 kDa)

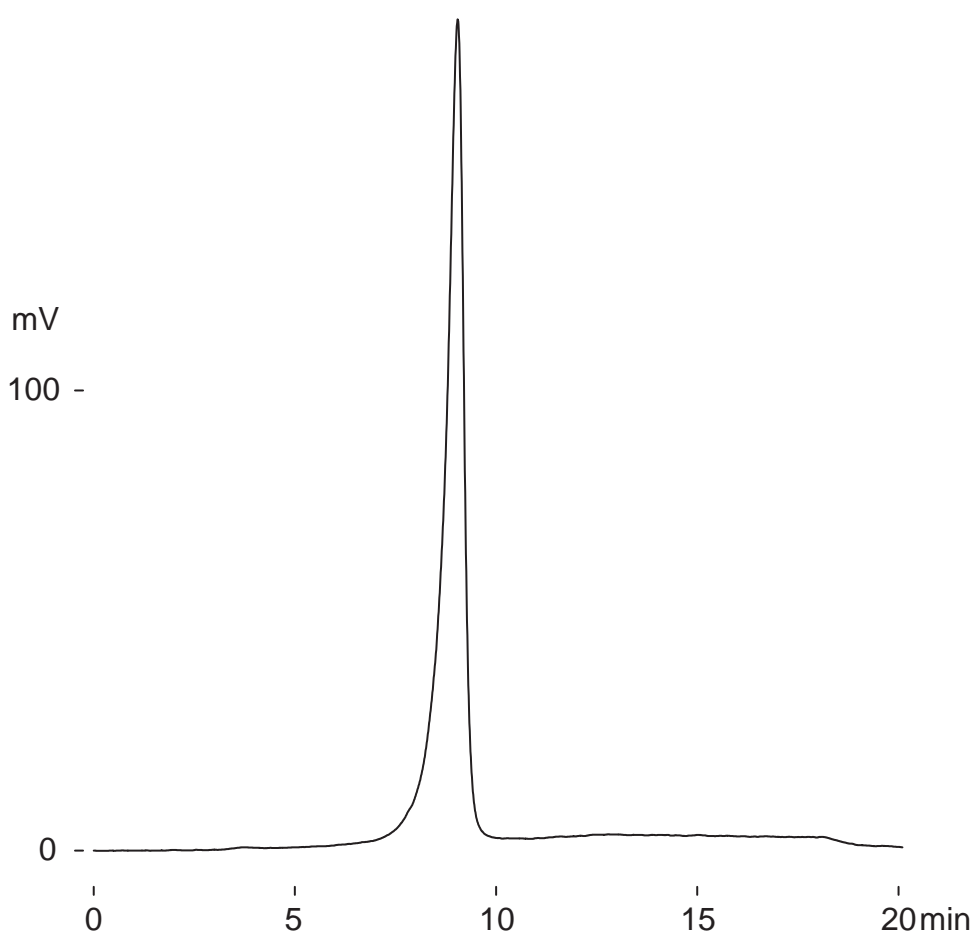

Presto FF-C18, 150 x 4.6mm

A: acetonitrile

B: tetrahydrofuran

20-90 %B (0-15min), 0.4 mL/min (9MPa), 37 deg.C

ELSD (spray chamber 50deg.C, drift tube 100deg.C)

0.6 uL (3 ug, tetrahydrofuran)